



Investigation of using a 1-phase to 3-phase static phase converter for fluorescent lighting loads
by Kung-Wei Hsiao

A THESIS Submitted to the Graduate Faculty in partial fulfillment of the requirements for the degree
of Master of Science in Electrical Engineering

Montana State University

© Copyright by Kung-Wei Hsiao (1957)

Abstract:

The purpose of this investigation is to determine how the 1-phase to 3-phase static phase converter can be used on fluorescent lighting loads.

Two types of lamps have been tested, namely, the 96-T12-73 slim lamp and the 15-watt cold-white lamp.

The lamps are connected into delta to the phase converter. The balances of the system have been investigated for various supply voltages. Lamps starting under this circuit connection is tested.

The stroboscopic effect of the fluorescent lamp is reduced to 5% to 8% by this circuit connection.

INVESTIGATION OF USING A 1-PHASE
TO 3-PHASE STATIC PHASE CONVERTER
FOR FLUORESCENT LIGHTING LOADS

by

Kung-Wei Hsiao

A THESIS

Submitted to the Graduate Faculty

in

partial fulfillment of the requirements


for the degree of


Master of Science in Electrical Engineering


at

Montana State College

Approved:

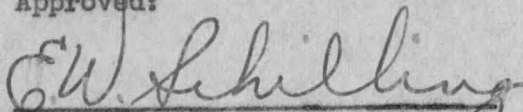
Head, Major Department


Chairman, Examining Committee


Dean, Graduate Division

Bozeman, Montana
September, 1957

N378
H 859v
cop. 2

1088B

TABLE OF CONTENTS

Chapter	Page
Abstract.	ii
List of Tables.	iii
List of Figures	iv
I Introduction.	1
II The Static Phase Converter.	3
III Testing on Individual Lamps to Find their Electrical Characteristics	5
IV Balancing of the System	13
V Starting Test	35
VI Stroboscopic Effect Investigation	41
VII Conclusions	47
Appendix	48
Acknowledgement.	52
References.	53


ABSTRACT

The purpose of this investigation is to determine how the 1-phase to 3-phase static phase converter can be used on fluorescent lighting loads.

Two types of lamps have been tested, namely, the 96-T12-73 slim lamp and the 15-watt cold-white lamp.

The lamps are connected into delta to the phase converter. The balances of the system have been investigated for various supply voltages. Lamps starting under this circuit connection is tested.

The stroboscopic effect of the fluorescent lamp is reduced to 5% to 8% by this circuit connection.

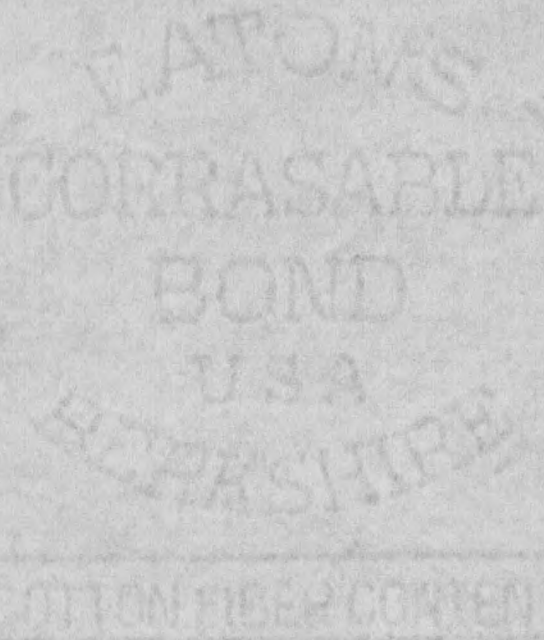

List of Tables

Number		Page
Ia	First Lamp (15-Watt Cold-White)	7
Ib	Second Lamp (15-Watt Cold-White).	8
Ic	Third Lamp (15-Watt Cold-White)	9
IIa	First Lamp (Slim Line Lamp 96-T12-73)	10
IIb	Second Lamp (Slim Line Lamp).	11
IIc	Third Lamp (Slim Line Lamp)	12
III	Balancing Calculation for 15-Watt Cold-White Lamp . . .	15
IV	Balancing Calculation for Slim Line Lamp.	15
Va	(15-Watt Lamp Balanced at $V_1 = 125$ Volts)	24
Vb	(15-Watt Lamp Balanced at $V_1 = 120$ Volts)	25
Vc	(15-Watt Lamp Balanced at $V_1 = 115$ Volts)	26
Vd	(15-Watt Lamp Balanced at $V_1 = 110$ Volts)	27
VIa	(Slim Line Lamp Balanced at $V_1 = 125$ Volts)	28
VIb	(Slim Line Lamp Balanced at $V_1 = 120$ Volts)	29
VIc	(Slim Line Lamp Balanced at $V_1 = 115$ Volts)	30
VId	(Slim Line Lamp Balanced at $V_1 = 110$ Volts)	31
VIe	(Slim Line Lamp Balanced at $V_1 = 105$ Volts) Line Current Voltage and Power Factor.	32
VII	(15-Watt Cold-White Lamp)	
	Balanced at 125 Volts.	36
	Balanced at 120 Volts.	36
	Balanced at 115 Volts.	37
	Balanced at 110 Volts.	37
	Single Lamp.	38

List of Tables (Con't)

Number	Page
VIII (Slim Line Lamp)	
Balanced at 125 Volts.	39
Balanced at 120 Volts.	39
Balanced at 115 Volts.	39
Balanced at 110 Volts.	39
Balanced at 105 Volts.	39
Single Lamp.	39
IX (15-Watt Gold-White Lamp)	43
X (Slim Line Lamp).	44

List of Illustrations

Figure		Page
1	Circuit of the static phase converter.	3
2	Lamp circuit	14
3a	15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics ---Balanced at $V_1 = 125$ v. . . .	16
3b	15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics --- Balanced at $V_1 = 120$ v. . . .	17
3c	15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics --- Balanced at $V_1 = 115$ v. . . .	18
3d	15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics --- Balanced at $V_1 = 110$ v. . . .	19
4a	Slim Line Lamp, Phase Current and Voltage Character- istics --- Balanced at $V_1 = 125$ v.	20
4b	Slim Line Lamp, Phase Current and Voltage Character- istics --- Balanced at $V_1 = 120$ v.	21
4c	Slim Line Lamp, Phase Current and Voltage Character- istics --- Balanced at $V_1 = 115$ v.	22
4d	Slim Line Lamp, Phase Current and Voltage Character- istics --- Balanced at $V_1 = 110$ v.	23
5	Power Factor Characteristics --- 15-Watt Cold-White .	33
6	Power Factor Characteristics --- Slim Line Lamp . . .	34
7	Photocell Circuit.	41
8	Light Output Deviation --- 15-Watt Cold-White Lamp. .	45
9	Light Output Deviation --- Slim Line Lamp	46

COTTON FIBER CONTENT

CHAPTER I

INTRODUCTION

Every lamp when burned in the usual manner on alternating current has a non-uniform light output caused by the cyclic variations in current. A fluorescent lamp is an electric discharge device. Instead of generating light from direct heating of the tungsten wire, as in an incandescent lamp, the fluorescent lamp is not to produce light, but rather to generate a short-wave ultraviolet and then employ fluorescent chemicals or phosphors which can effectively convert this ultraviolet energy into visible light. As soon as the current which passes through the lamp is zero, there will be no more short-wave ultraviolet wave to excite the fluorescent chemicals, the lamp will practically generate no light at this event. Therefore, the light drops to zero along with the current between each half cycle.

This flicker or stroboscopic effect causes certain strain on human eyes. Hence various means have been developed in order to reduce this effect. One of the effective means to reduce this flicker is by using several lamps together, each supplied by a different phase voltage, so that the flicker of each lamp occurs at a different time. The net result will greatly reduce this stroboscopic effect. The two-lamp ballast is practically based on this fact.

It is easy to see that by supplying a balanced three-phase voltage to a three-lamp set, the flicker of this whole set will be far more reduced than the flicker of a two-lamp circuit.

Recently certain means have been developed which serve as a very convenient way to split a single phase, almost under all load conditions, into a balanced three-phase system. Therefore, by suitable application of this circuit, it is possible to reduce the stroboscopic effect in fluorescent lights.

This investigation is mainly concerned with the application of this static phase converter to the fluorescent lamp and to see how the circuit will be balanced and how the stroboscopic effect is reduced.

In this investigation, two types of fluorescent lamps have been tested, namely the 96-T12-73 slim lamp and the 15-watt cold-white lamp.

CHAPTER II

THE STATIC PHASE CONVERTER

In a recent article,^{1/} J. C. Hogan suggested a static phase converter which consists of a condenser and an autotransformer. By adjusting the value of the condenser and the ratio of the autotransformer, it can convert a single phase into a well balanced three-phase system for any load possessing a lagging power factor. The general form of the circuit is shown in Figure 1.

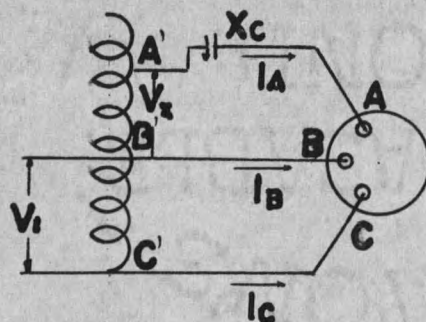


Figure 1. Circuit of the static phase converter.

Where: A, B and C are the terminals of the three balanced phases.

To secure a balanced three-phase system the value of X_c and the N of the transformer can be calculated from the following formulas. (See Appendix)

$$X_c = \frac{3}{2} \frac{Z_{m1}}{\sin \theta_{m1}}$$

$$N = \frac{\cos(\theta_{m1} + 30^\circ)}{\sin \theta_{m1}}$$

^{1/} Hogan, J. C., AIEE Transaction, "Analyzing Single-Phase to 3-Phase Static Phase Converter," January 1956, p. 403.

Where: Z_{m1} is the positive sequence impedance per phase of the load which is in Y connection.

$\cos\phi_1$ is the positive sequence power factor.

In order to make this static phase converter apply to the fluorescent lamp, certain changes are necessary.

Since most lighting systems are 110 volts, to secure enough voltage for the fluorescent lamps, the lamps should be connected in delta. Since these lamps are similar, they may be treated as a balanced three-phase load which can be easily transferred into an equivalent Y connected load by letting:

$$Z_{m1} = \frac{1}{3}Z_a$$

Where: Z_a is the impedance of each lamp in delta connection.

Z_{m1} is the equivalent impedance per phase in Y connection.

Furthermore, since the lamps form a balanced delta circuit, it can be assumed that their negative and zero sequence impedance is zero.

Knowing the Z_a and power factor of each lamp, the values of N and X_c may be readily determined.

CHAPTER III

TESTING ON INDIVIDUAL LAMPS

TO FIND THEIR ELECTRICAL CHARACTERISTICS

The aim of this test is to find out the impedance and power factor of each lamp so as to apply to the foregoing equations to secure a balanced three-phase system.

However, as the lamp circuit is connected in delta to the static phase converter, the third harmonic of the lamp current will circulate around the delta and will not appear in the line current. Hence the impedance and power factor of each lamp which is calculated, based on testing of individual lamps, will be different from those in delta connection owing to the absence of the third harmonic. To make less error, it is assumed that there is no third harmonic in the lamp current. A wave analyzer is used to determine the fundamental, third harmonic and fifth harmonic of the lamp current. The fifth harmonic is negligible compared to the fundamental; hence only the fundamental along with the power consumed and applied voltage is used to find the power factor of each lamp which has been shown in Table 1 and Table 2.^{1/}

There is a condenser in the ballast of the fluorescent lamp circuit which merely serves as a power-factor correction device, therefore in our test we disconnect it from the circuit.

The impedance and power factor of the fluorescent lamp is not a constant. It changes with different supply voltages. The supply voltage

^{1/} The lamp impedance is calculated based on the total lamp current (including the third harmonic) since it is closer to the value of the actual balance by this way.

was varied from 80 volts to 140 volts with an increase of 5 volts in each step. Then all readings were taken and the impedances and power factors were calculated. The complete data is shown in Table I and Table II.

The power consumed as listed in the tables is the actual power consumed in the lamp. The meter loss has been subtracted.

Three different lamps of each kind have been tested.

TABLE Ia. FIRST LAMP (15-WATT COLD-WHITE).

V	I	P	I ₁	I ₃	I ₅	Cos θ_{m1}	Z
140	0.55	29.4	0.50	.108		0.420	254
135	0.48	26.1	0.436	.089		0.444	281
130	0.422	22.7	0.38	.070		0.460	308
125	0.372	20.6	0.336	.0538		0.491	336
120	0.330	18.0	0.296	.041		0.508	364
115	0.285	16.4	0.260	.0324		0.550	404
110	0.254	14.8	0.234	.0268		0.576	433
105	0.227	13.3	0.212	.0230		0.598	462
110	0.200	11.8	0.186	.0200		0.634	500
95	0.178	10.2	0.160	.0190		0.672	534
90	0.151	8.6	0.138	.0176		0.692	596
85	0.126	7.0	0.114	.0160		0.724	674
80	0.100	5.6	0.090	.0150		0.779	800

Remark: V Supply voltage in volt
 I Lamp current in ampere
 P Power consumed in watt
 I₁ Fundamental current in ampere
 I₃ Third harmonic in ampere
 I₅ Fifth harmonic in ampere
 Cos θ_{m1} Power factor of fundamental
 Z Lamp impedance in ohm

TABLE Ib. SECOND LAMP (15-WATT GOLD-WHITE).

V	I	P	I_1	I_2	I_3	$\cos \theta_m$	Z
140	0.534	28.2	0.49	0.094		0.411	262
135	0.470	25.6	0.432	0.078		0.439	287
130	0.416	22.5	0.390	0.058		0.445	312
125	0.368	20.5	0.350	0.0450		0.470	350
120	0.332	18.0	0.316	0.0356		0.486	361
115	0.302	16.4	0.284	0.0296		0.503	380
110	0.272	14.9	0.252	0.0256		0.539	404
105	0.239	13.2	0.228	0.0230		0.552	440
100	0.211	12.1	0.200	0.0210		0.605	473
95	0.185	10.4	0.178	0.0200		0.616	513
90	0.159	8.4	0.150	0.0184		0.621	566
85	0.130	7.3	0.120	0.0176		0.715	654
80	0.102	5.8	0.090	0.0160		0.805	784

TABLE Ic. THIRD LAMP (15-WATT GOLD-WHITE).

V	I	P	$I_{\frac{1}{2}}$	$I_{\frac{3}{2}}$	$I_{\frac{5}{2}}$	$\cos \theta_{\frac{1}{2}}$	Z
140	0.518	27.7	0.476	0.104	0.0334	0.417	270
135	0.458	24.7	0.418	0.080	0.0222	0.439	295
130	0.403	22.7	0.376	0.0624	0.0152	0.464	323
125	0.358	20.1	0.334	0.0488	0.0092	0.481	349
120	0.317	17.5	0.296	0.0398	0.0044	0.493	379
115	0.274	15.6	0.264	0.0336	0.0020	0.515	420
110	0.244	14.7	0.232	0.0296	0.0011	0.575	450
105	0.220	13.2	0.208	0.0268	0.0012	0.605	476
100	0.192	11.5	0.180	0.0240	0.0012	0.640	520
95	0.167	9.9	0.154	0.0224	0.0022	0.679	570
90	0.140	8.1	0.128	0.0210	0.0028	0.704	643
85	0.114	6.5	0.100	0.0192	0.0033	0.764	745
80	0.090	4.9	0.076	0.0170	0.0037	0.805	890

TABLE IIa. FIRST LAMP (SLIM LINE LAMP 96-T12-73)

V	I	P	I_1	I_3	I_5	$\cos \phi_{m_1}$	Z
135	3.72	141.5	3.40	0.454	0.130	0.307	36.3
130	3.35	128.6	3.16	0.358	0.086	0.312	38.8
125	3.08	118.2	2.88	0.272	0.058	0.328	40.6
120	2.83	109.2	2.60	0.198	0.0304	0.350	42.4
115	2.64	101.8	2.40	0.156	0.0182	0.369	43.5
110	2.44	94.3	2.20	0.130	0.0160	0.390	45.1
105	2.26	87.5	2.00	0.112	0.0158	0.416	46.5
100	2.10	81.2	1.88	0.100	0.016	0.431	47.6
95	1.95	74.9	1.72	0.092	0.0158	0.458	48.7
90	1.80	69.9	1.58	0.076	0.0156	0.491	50.0
85	1.64	63.0	1.40	0.062	0.0156	0.530	51.9
80	1.49	56.7	1.24	0.056	0.0156	0.571	53.7

TABLE IIb. SECOND LAMP (SLIM LINE LAMP)

V	I	P	I ₁	I ₃	I ₅	cos θ_{m_1}	Z
135	3.51	135.1	3.44	.424	.116	0.291	38.4
130	3.23	123.8	3.12	.310	.072	0.305	40.2
125	2.97	114.2	2.88	.240	.040	0.318	42.1
120	2.75	105.6	2.64	.186	.030	0.333	43.6
115	2.56	99.00	2.43	.146	.020	0.347	44.9
110	2.40	92.30	2.28	.134	.018	0.368	45.8
105	2.23	85.90	2.08	.120	.018	0.393	47.1
100	2.06	79.00	1.92	.116	.017	0.411	48.5
95	1.91	73.4	1.76	.110	.017	0.439	49.7
90	1.77	67.9	1.62	.104	.017	0.466	50.9
85	1.61	61.4	1.46	.100	.016	0.495	52.7
80	1.46	55.3	1.30	.098	.016	0.531	54.8

TABLE IIc. THIRD LAMP (SLIM LINE LAMP).

V	I	P	I ₁	I ₃	I ₅	Cos θ_{m_1}	Z
135	3.58	137.5	3.42	.372	.090	0.298	37.7
130	3.30	126.8	3.10	.288	.054	0.314	39.4
125	3.06	117.8	2.88	.210	.032	0.328	40.8
120	2.84	110.2	2.68	.162	.021	0.343	42.2
115	2.55	103.1	2.48	.150	.019	0.362	45.1
110	2.46	96.1	2.30	.132	.019	0.380	44.7
105	2.30	89.5	2.10	.124	.019	0.406	45.6
100	2.14	82.4	1.92	.116	.019	0.429	46.7
95	1.96	76.0	1.76	.108	.0186	0.455	48.5
90	1.81	70.1	1.60	.102	.0180	0.497	49.7
85	1.65	63.1	1.44	.096	.0180	0.518	51.5
80	1.50	57.0	1.28	.092	.0178	0.558	53.5

CHAPTER IV

BALANCING OF THE SYSTEM

It has been shown in Chapter III that neither the impedance nor the power factor of the lamp is a constant; they change as the supply voltage changes. But the static phase converter can furnish a balanced three-phase voltage only at a constant impedance and power factor of the load. As soon as the impedance and power factor of the lamps are changed due to the change of supply voltage, the system will no longer be balanced.

In these tests we wish to find out how the supply voltage will affect the balancing of this static phase converter.

125, 120, 115, 110 and 105 volts are chosen as the particular balancing voltages for the system. From Table I and Table II we find out the corresponding impedance and power factor of the lamps at these particular voltages. Then X_c and N values are calculated from equations 1 and 2. However, the impedances and power factors of the three lamps are not identical, so their mean values are taken. The results of these calculations are shown in Table III and Table IV.

However, the values of X_c and N for actual balance are little different from what we have calculated, which also has been shown in the same tables.

The general circuit connection is shown in Figure 2.

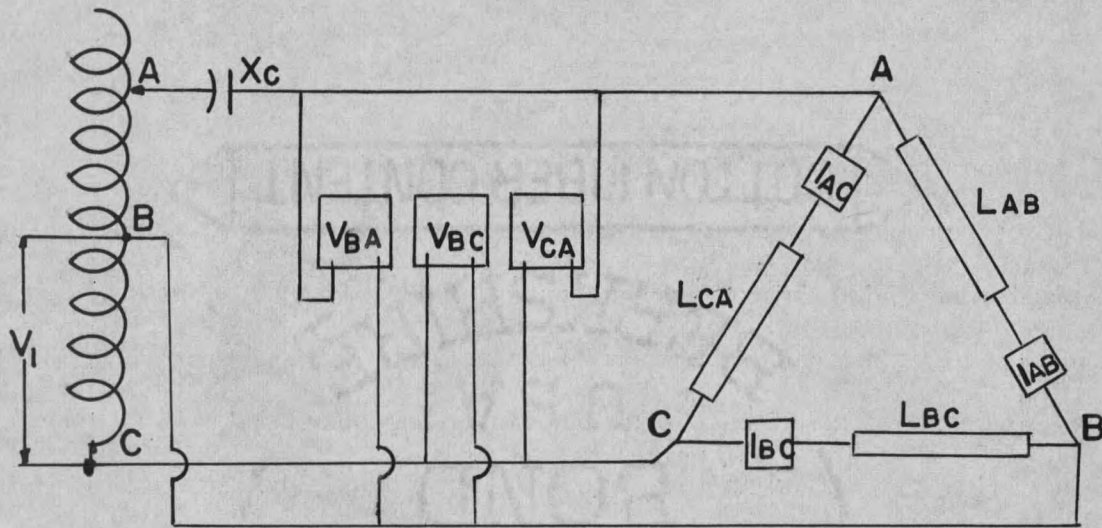


Figure 2. Lamp circuit.

After the system was balanced, the supply voltage V_1 was changed through a variac at the source. Phase current and voltage of the three lamps were recorded in order to see how the supply voltage affects the balance of the system.

Characteristic curves which show how the voltages and currents of these three lamps vary with various supply voltages are plotted in Figure 3 and Figure 4. However, as V_{bc} was the same as the supply voltage, it was not plotted on the curve sheets.

From Figures 3, and 4, it can be seen that V_{ca} and I_{ca} are almost constant during the variation of V_1 , while the V_{ab} and V_{bc} , I_{ab} and I_{bc} changed proportionally to each other.

The voltage, current and power consumed of the whole system is shown in Table V and Table VI. The characteristic curve of the power factor of the whole system is shown in Figure 5 and Figure 6.

TABLE III. BALANCING CALCULATION FOR 15-WATT COLD-WHITE LAMP

Balancing Calculation					Actual Balancing	
V_1	Z	Cos θ_n	c	N	c	N
125	345	0.481	13.5 u.f.	-0.0249	13.8 u.f.	-0.024
120	368	0.496	12.5 u.f.	-0.005	12.8 u.f.	-0.0033
115	401	0.528	11.0 u.f.	0.0285	11.6 u.f.	0.0191
110	429	0.563	10.2 u.f.	0.090	10.9 u.f.	0.064

TABLE IV. BALANCING CALCULATION FOR SLIM LINE LAMP

Balancing Calculation					Actual Balancing	
V_1	Z	Cos θ	c	N	c	N
125	41.2	.326	122 u.f.	-.201	119.5 u.f.	-.205
120	42.7	.342	117 u.f.	-.185	114.65u.f.	-0.183
115	44.5	.359	111 u.f.	-.166	106.5u.f.	-0.167
110	45.2	.379	107 u.f.	-.145	107 u.f.	-0.150
105	46.1	.405	105 u.f.	-.116	104 u.f.	-0.132

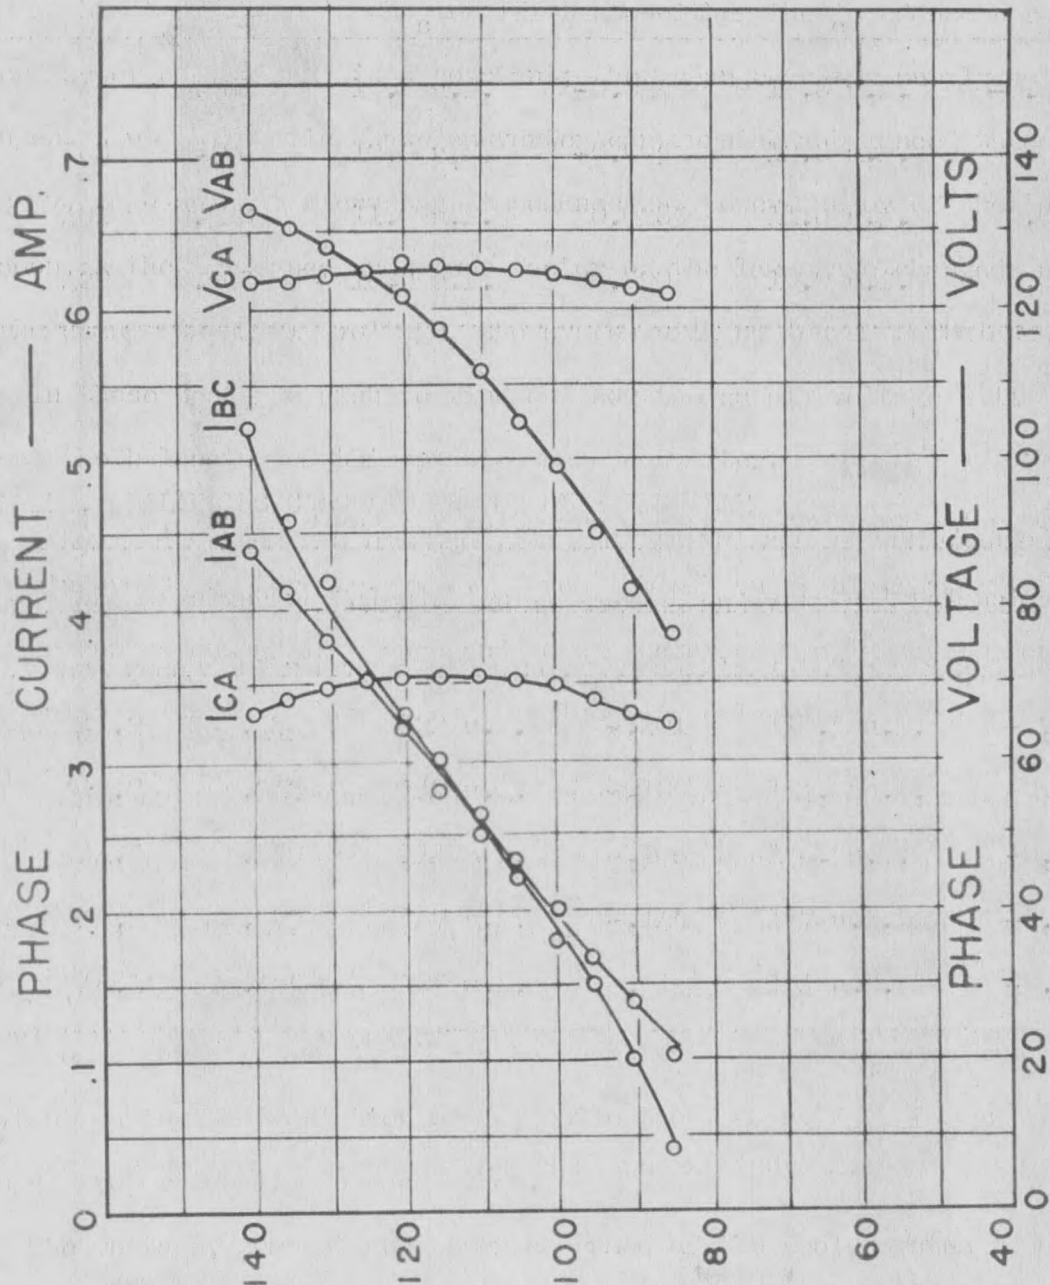


Figure 3a. 15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics — Balanced at $V_1 = 125$ v.

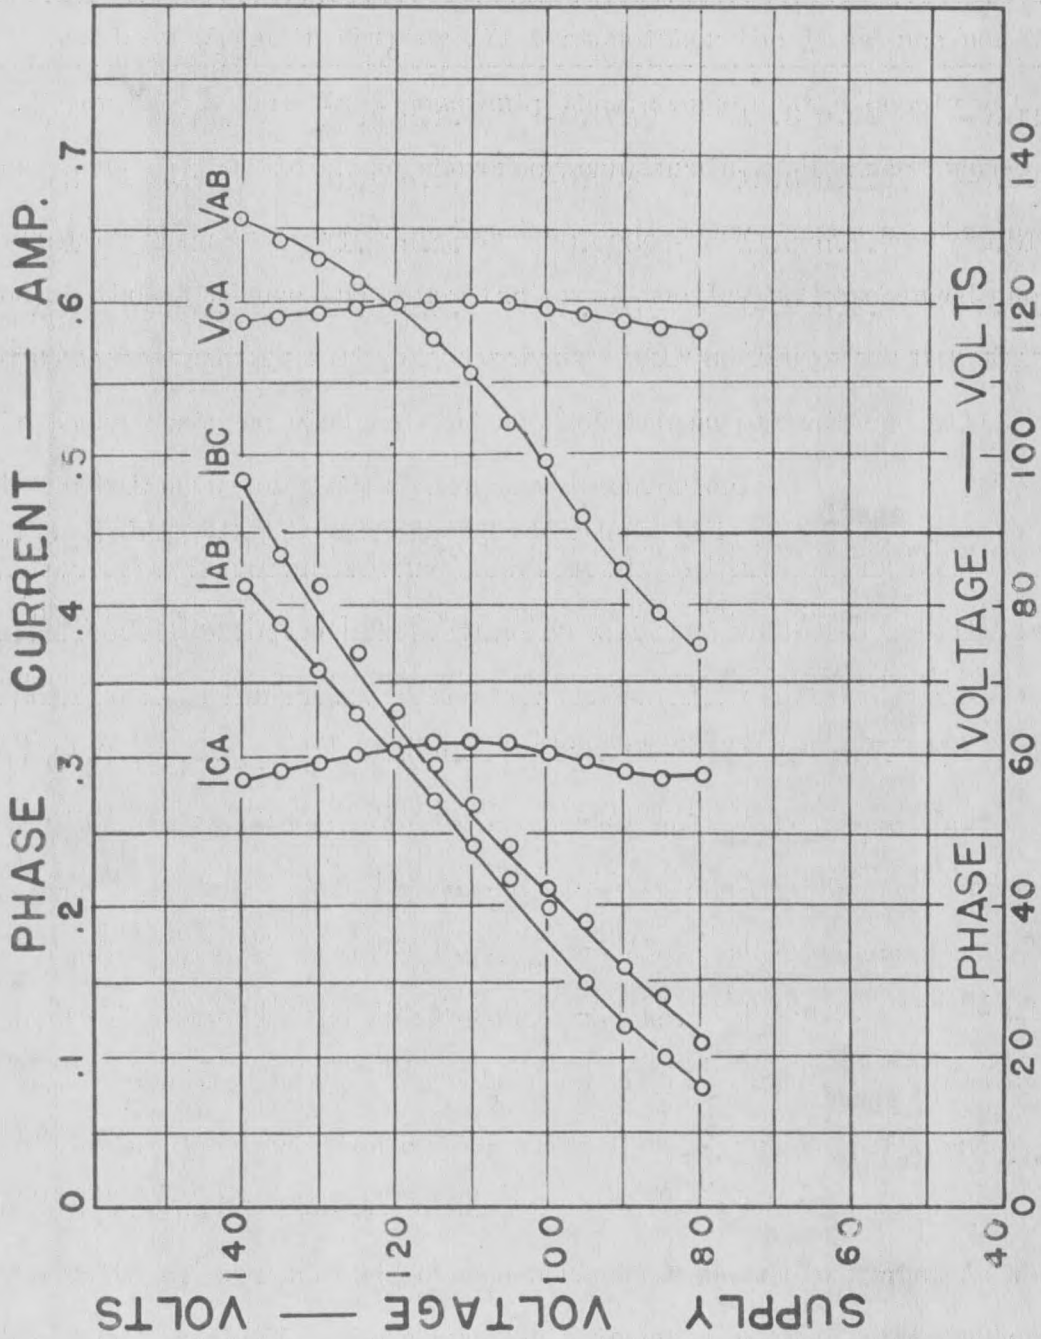


Figure 3b. 15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics -- Balanced at $V_1 = 120$ v.

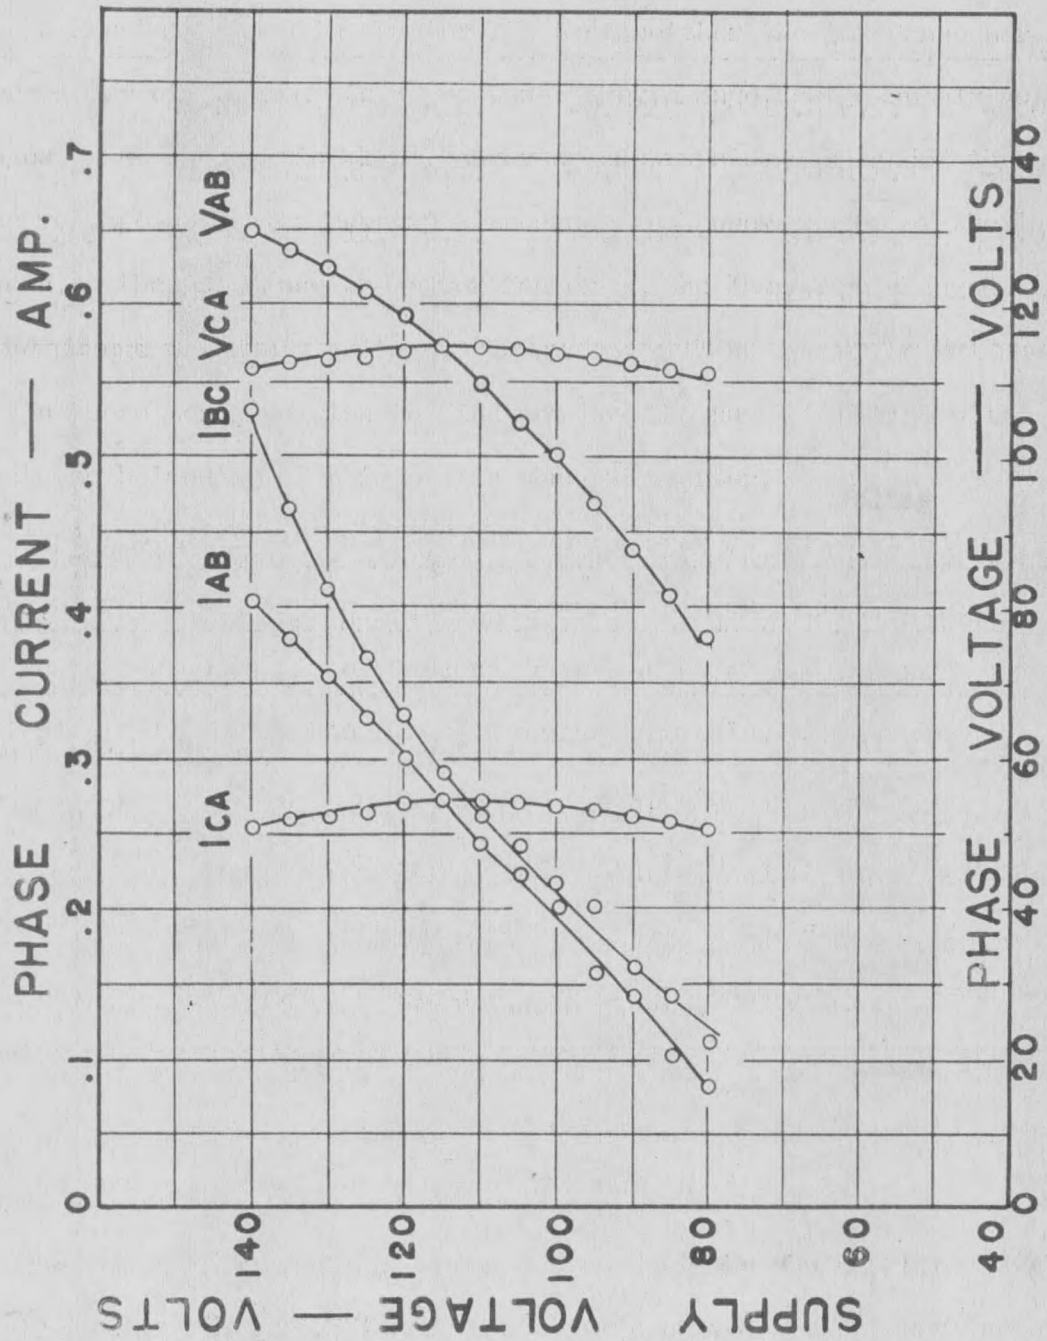


Figure 3 c. 15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics -- Balanced at $V_1 = 115$ v.

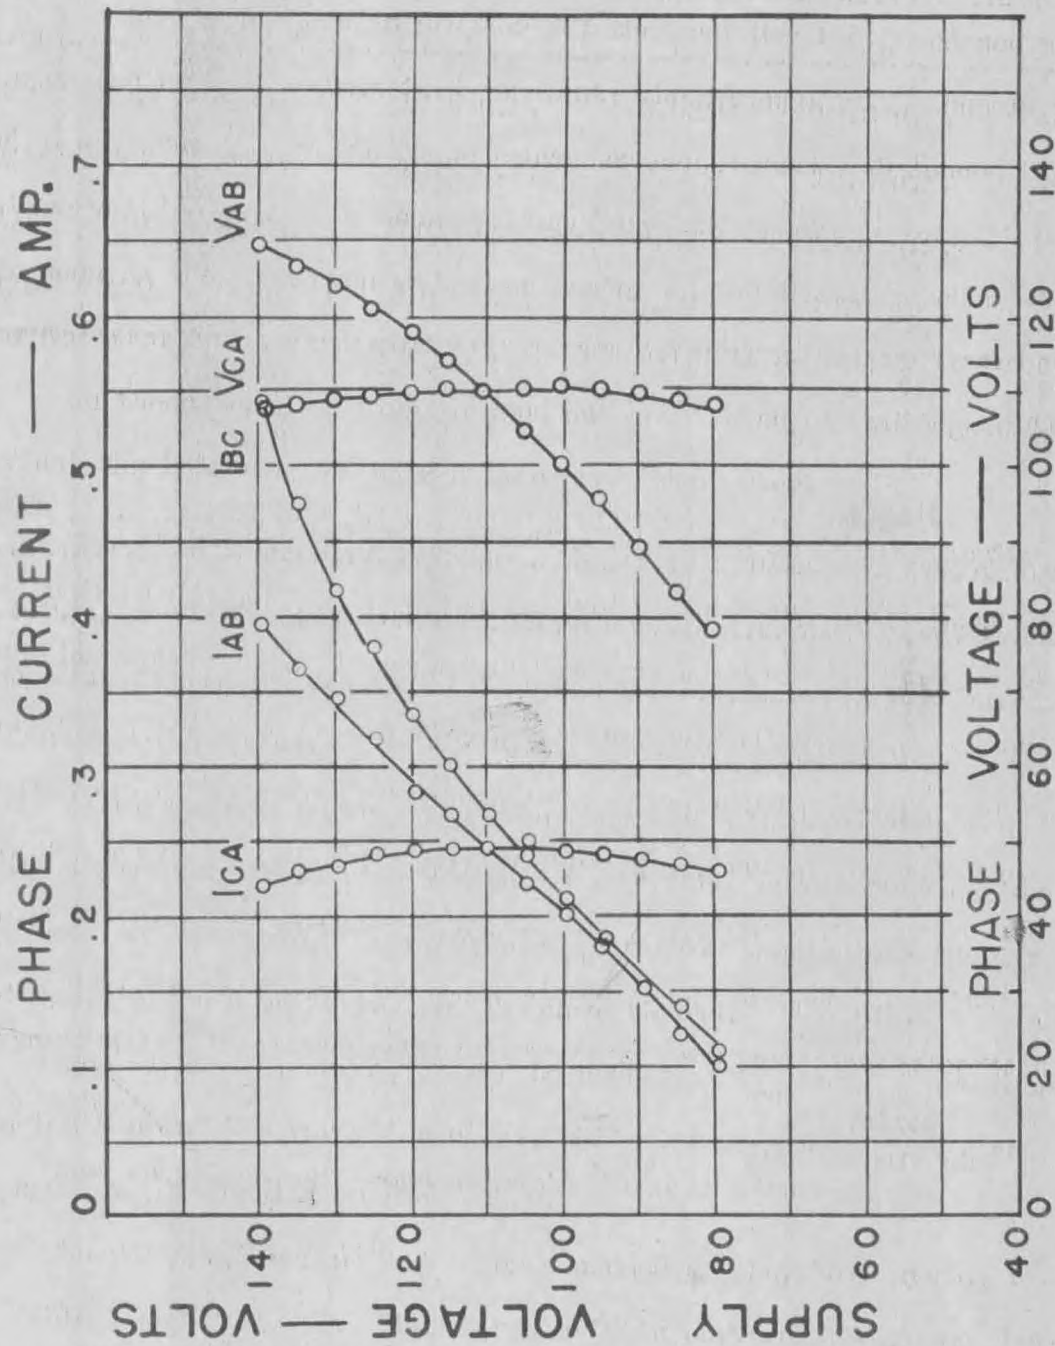


Figure 3d. 15-Watt Cold-White Lamp, Phase Current and Voltage Characteristics -- Balanced at $V_1 = 110$ v.

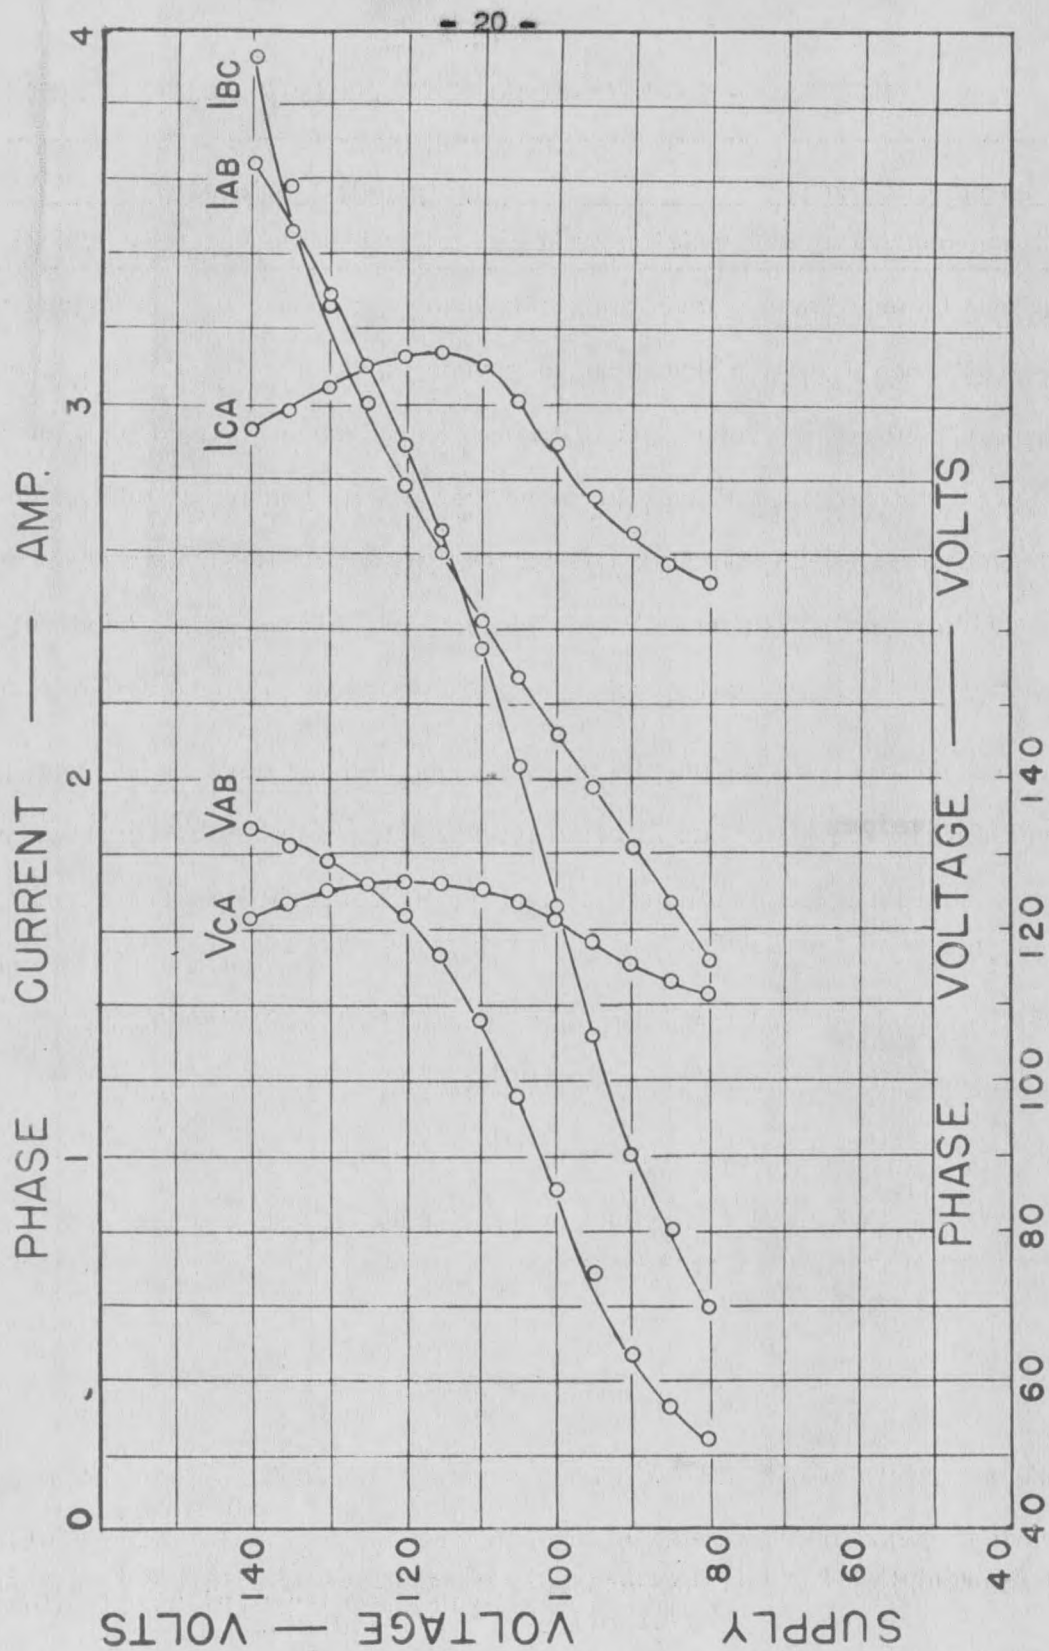


Figure 4a. Slim line Lamp, Phase Current and Voltage Characteristics —
Balanced at $V_1 = 125$ v.

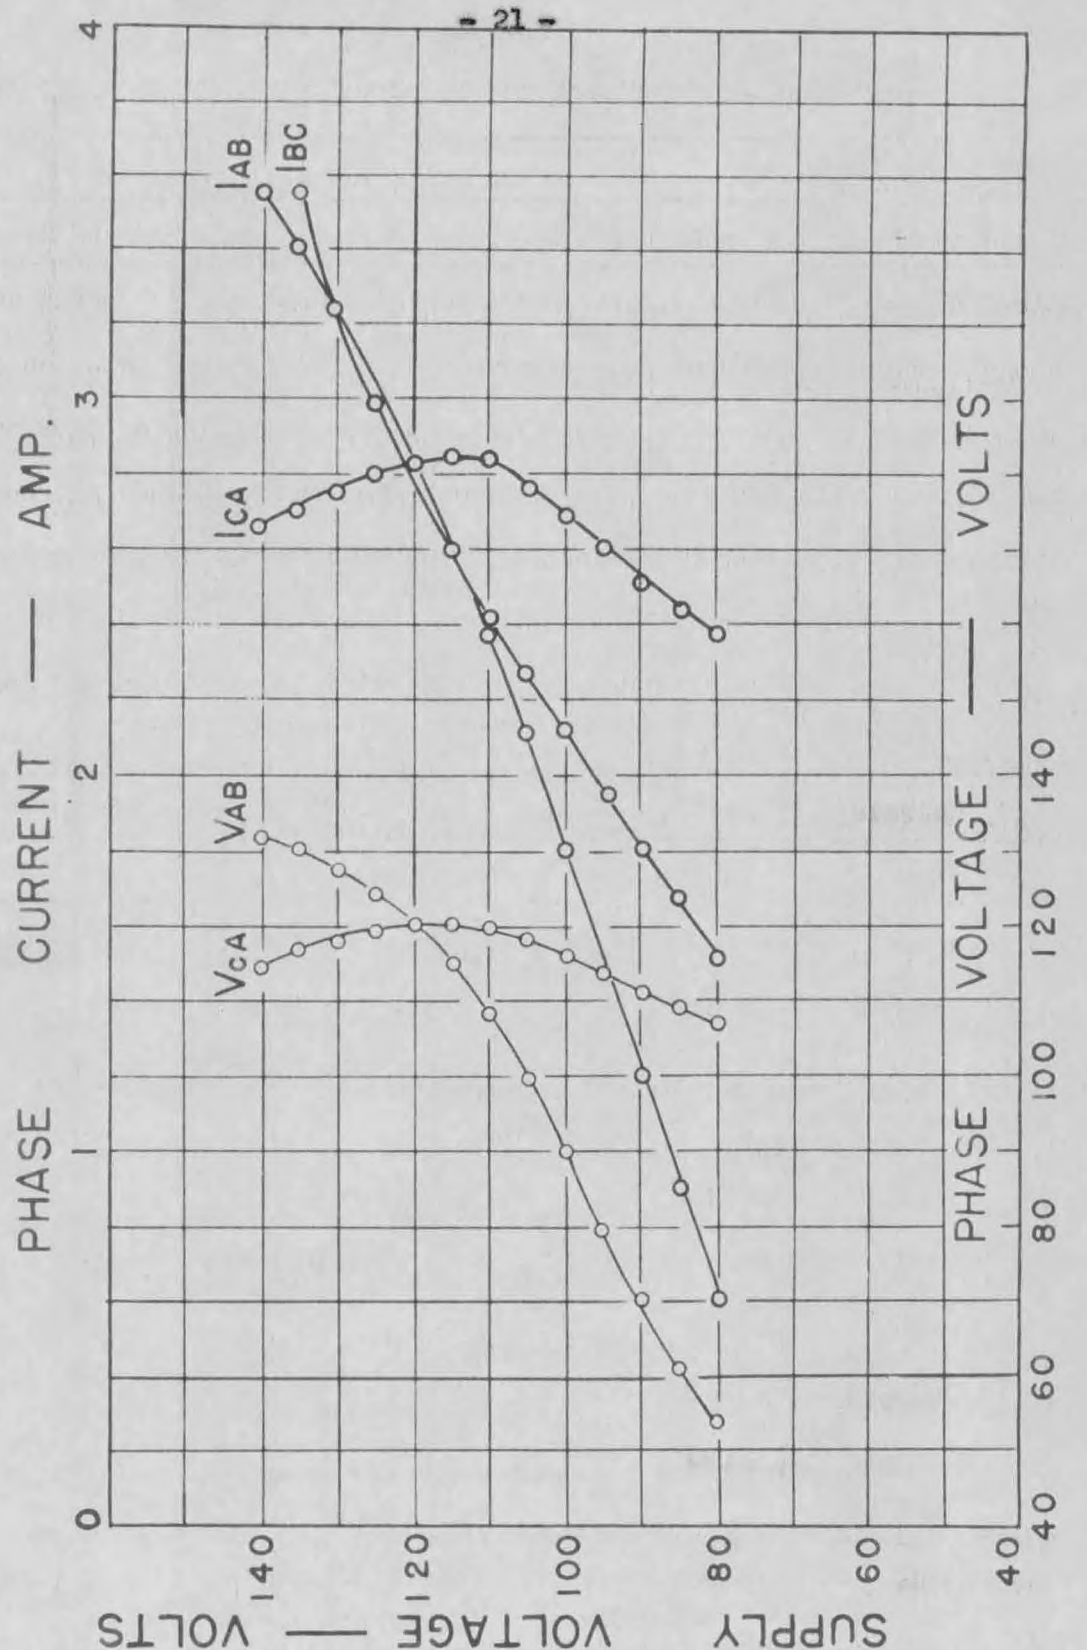


Figure 4b. Slim line Lamp, Phase Current and Voltage Characteristics --
Balanced at $V_1 = 120$ v.

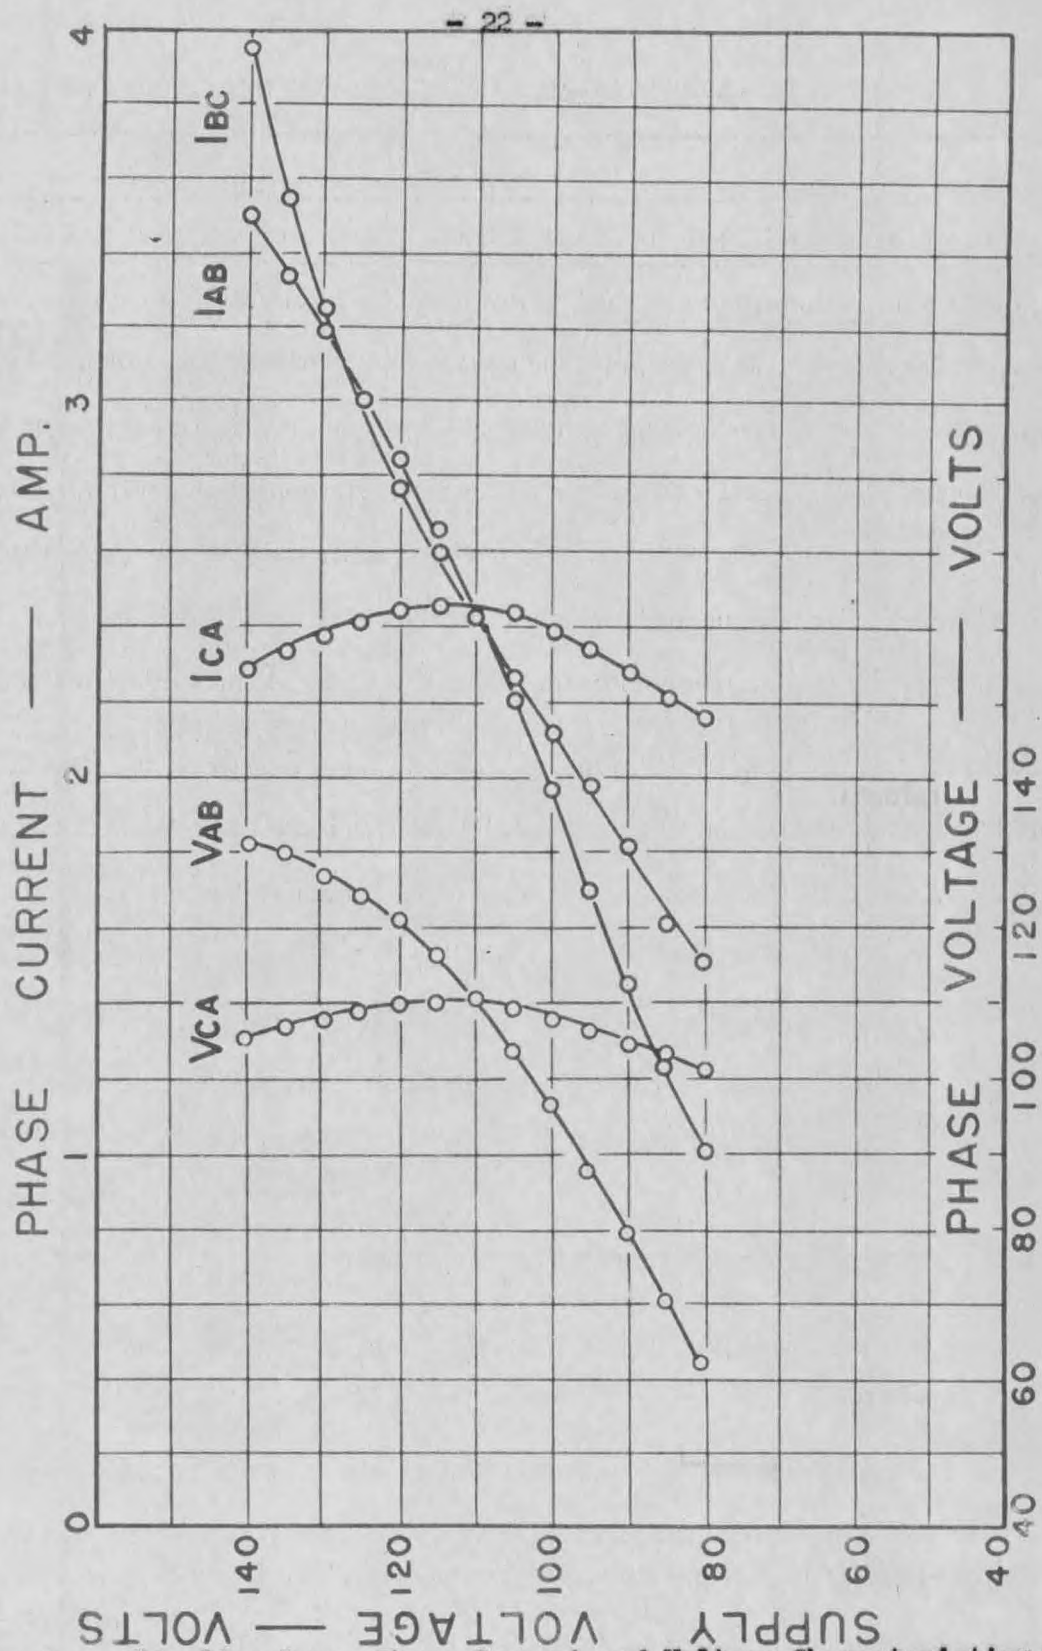


Figure 4c. Slim line Lamp, Phase Current and Voltage Characteristics —
Balanced at $V_1 = 115$ v.

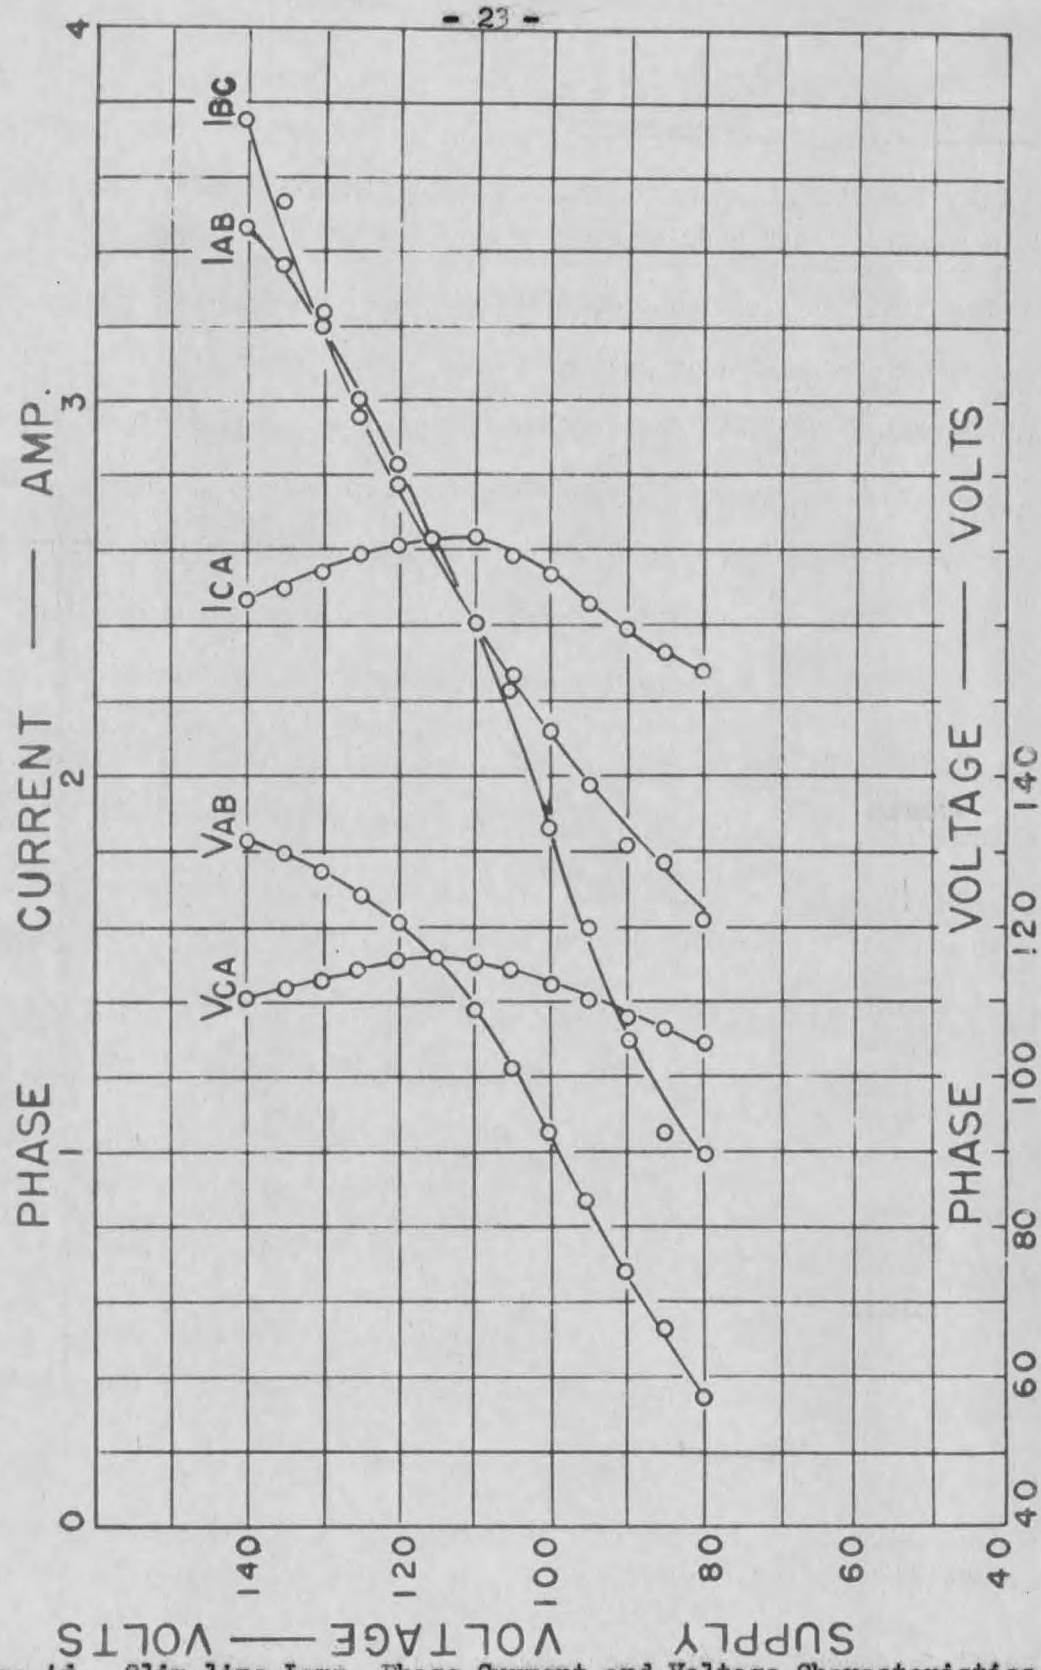


Figure 4d. Slim line Lamp, Phase Current and Voltage Characteristics -
Balanced at $V_1 = 110$ v.

TABLE Va. (15-WATT LAMP BALANCED AT
 $V_L = 125$ VOLTS)

V_L	I_L	P_a	$\cos \theta$
140	0.800	83.0	0.741
135	0.770	79.0	0.760
130	0.728	75.1	0.794
125	0.692	71.2	0.823
120	0.667	67.4	0.842
115	0.645	64.5	0.870
110	0.632	61.2	0.880
105	0.621	57.8	0.886
100	0.609	54.3	0.892
95	0.593	50.4	0.895
90	0.579	46.5	0.892
85	0.552	40.9	0.871
80	0.518	35.3	0.851

P_a Power consumed in the system - watts
 $\cos \theta$ Power factor of the whole system

